



CIP Project Update

Kernel Circle Street Improvements

Strategic Plan 2015 Goal:

3) Promote the Visual Image of El Paso

3.2) *Improve the visual impression of the community*

7) Enhance and Sustain El Paso's Infrastructure Network

7.3) *Enhance regional comprehensive transportation system*

May 5, 2015

"Delivering Outstanding Services"



Kernel Circle Street Improvements

Project Overview

District	6
City's Project Manager	Julian Rodriguez Engineering and Construction Management
Contractor's Project Manager	Bobby Stallard CSA Constructors
Construction Award	\$1,225,191.00
Funding Source	2012-2019 Street Infrastructure Certificates of Obligation – 100%
City Council Approval	November 11, 2014
Notice to Proceed	February 18, 2015



Kernel Circle Street Improvements

Project Limits



Phase-I Phase-II Phase-III Phase-IV

“Delivering Outstanding Services”



Kernel Circle Street Improvements

Scope of Work

- **Full roadway reconstruction from Betel to Betel**
- **ADA compliant new sidewalk and ramps**
- **Replace Curb and gutter**
- **New Parkway landscaping and irrigation**
- **Sharrow Bicycle Facilities**
- **Adjustments to water lines valves and sanitary sewer manholes**
- **Traffic calming measures**



Kernel Circle Street Improvements

Existing Condition



“Delivering Outstanding Services”



Kernel Circle Street Improvements

Landscape Improvements


- 200 Trees
- 613 Shrubs and other plant material
- Irrigation system
- Gravel mulch





Kernel Circle Street Improvements

Landscape Improvements

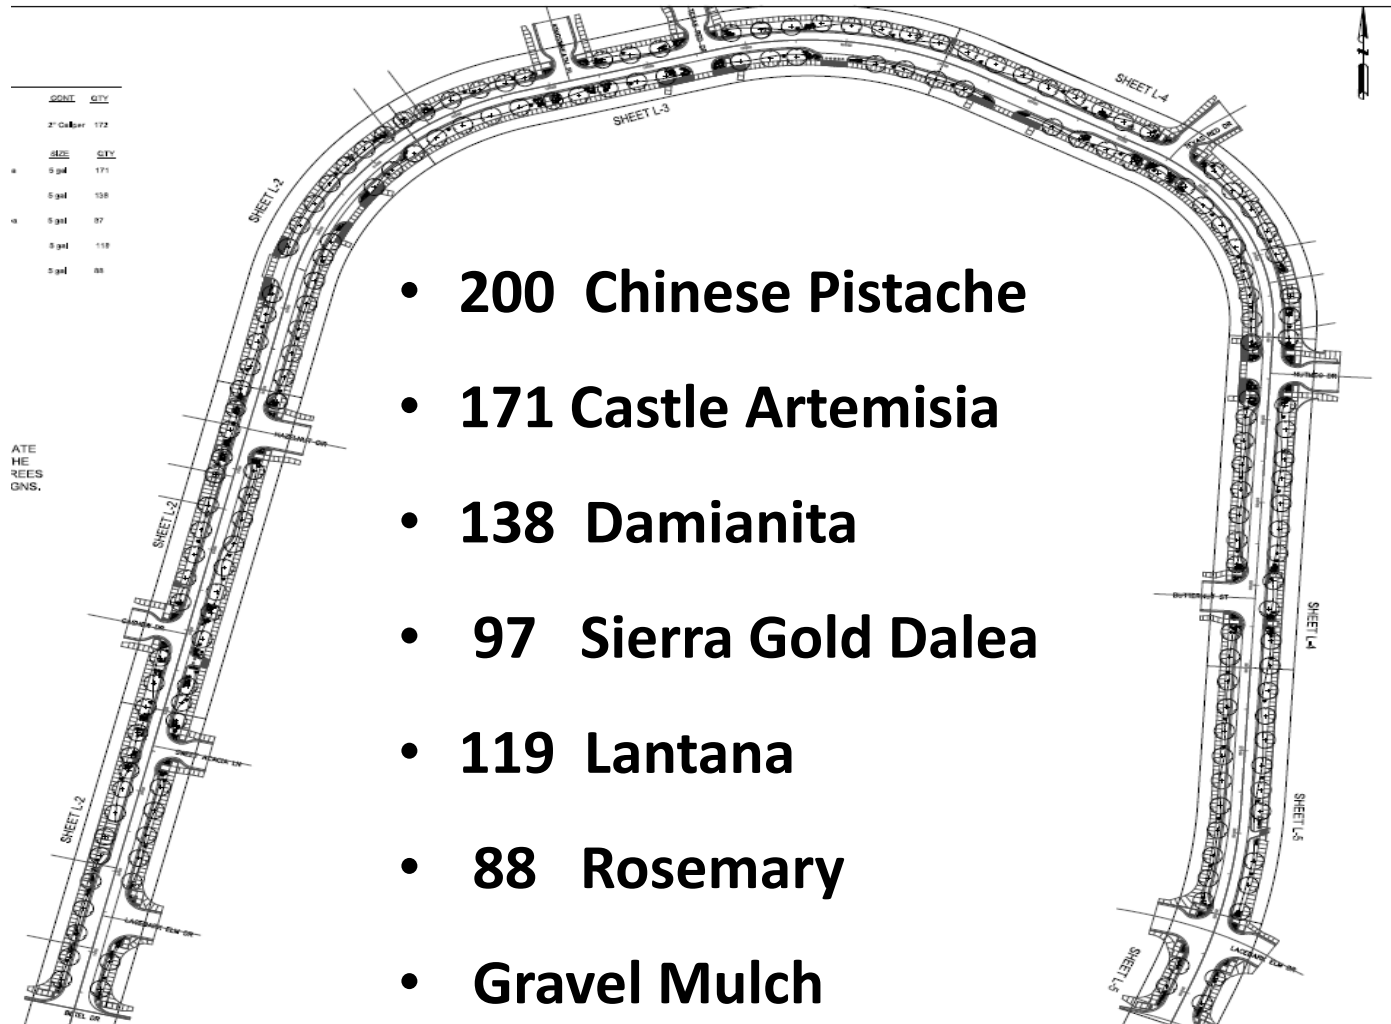

"Delivering Outstanding Services"



Kernel Circle Street Improvements

Landscape Improvements



Copyright © Robert O'Brien

Chinese Pistache

"Delivering Outstanding Services"



Kernel Circle Street Improvements

Landscape Improvements



"Delivering Outstanding Services"



Kernel Circle Street Improvements

Landscape Improvements



"Delivering Outstanding Services"



Kernel Circle Street Improvements

Progress to Date

Phase I (Betel to Hazel Nut)

- **Removal of all existing curb & gutters, sidewalks, driveways**
- **Removal of all existing asphalt and base course**
- **Finished roadway subgrade compaction**
- **Finish placement and compaction of base course**
- **Started the placement of sidewalks**



Kernel Circle Street Improvements

Public Outreach and Community Engagement

- **2/16/2015 – Open House Community Meeting**
- **2/26/2015 – Community Meeting in conjunction with Representative Ordaz**
- **Public Service Announcements**
- **E-News Letter updates**
- **Coordination with Neighborhood Associations regarding community meetings**



Kernel Circle Street Improvements

Threats to Project Completion

- None at this time.



Kernel Circle Street Improvements

Roadway construction completion: November 30, 2015

Landscape implementation completion: December 2015

